


MINE TAILINGS

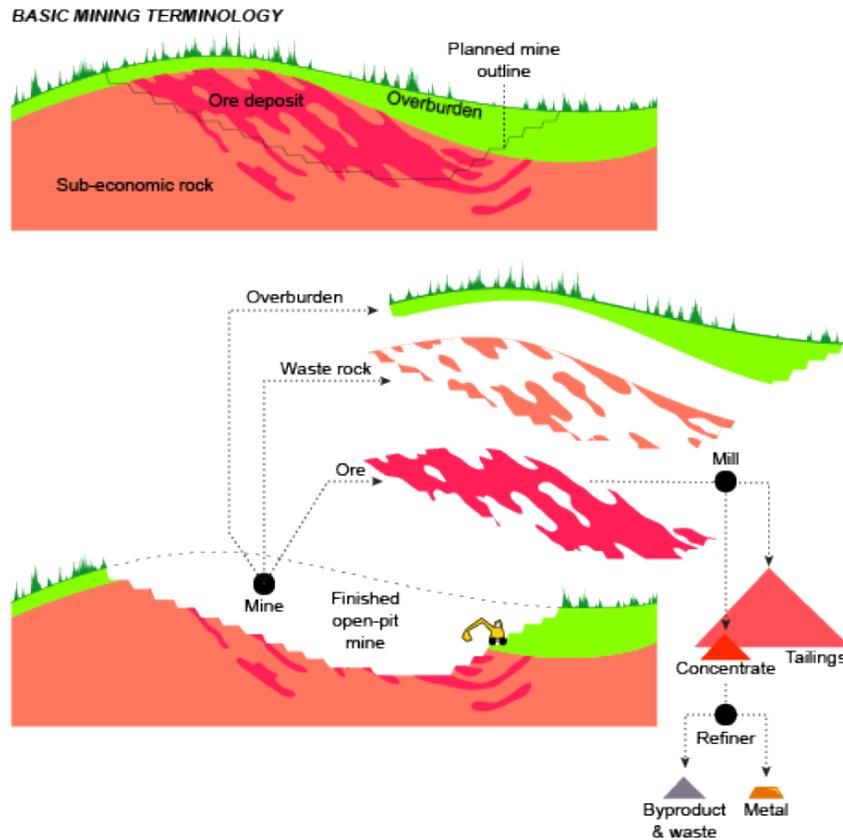

Basic Mining Terminology: An overview of basic mining terms and where various components of a mineral deposit end up.

Mine tailings are the ore waste of mines, and are typically a mud-like material.

Worldwide, the storage and handling of tailings is a major environmental issue. Many tailings are toxic and must be kept perpetually isolated from the environment. Scale of tailings production is immense, since metal extraction is usually only ounces or pounds, for every ton of ore. Tailings containment facilities are regarded as the world's largest man-made objects.

Terminology

Mine tailings' size and composition depends on the mining method. For hardrock metal mines, tailings are usually a very fine mud or powder, which is left over after ore is crushed and valuable minerals are extracted from it. Tailings may also contain chemicals used for mineral extraction.

Tailings are distinct from “waste rock”, which is the non-ore rock which miners move and discard as they dig down to access the underlying ore. They are also distinct from soil and organic matter (collectively known as "overburden"), which is removed from the surface above the ore deposit.

Oil sands production also produces tailings, which are substantially different. Oil sands tailings are the residue which remains after bitumen is separated from virgin oil sands. Although this article focuses on hardrock tailings, oil sands tailings can contain a similarly complex and toxic brew of minerals and chemicals, and pose a similar handling and storage challenge.

Disposal

Disposal of mine tailings is usually the single biggest environmental concern facing a hardrock metal mine, and creates very long-term environmental liabilities which future generations must manage. Many mine tailings do not become appreciably safer over time, if stored properly, and therefore must be stored for an indefinite period using current technology.

The historically-used alternative to storage was to dispose of tailings in the most convenient way possible (such as river dumping), which led to widespread environmental contamination in mining areas. This was nominally viable in earlier eras, but human production of mine tailings has increased by several orders of magnitude in the modern age, making such methods unacceptable to many societies.

Typical Mine Tailings Dam



Earthen tailings impoundment dam at Fort Knox gold mine in Alaska

source: Northern Alaska Environmental Center (2004). Copyright held by photographer.

Hazardous Properties

Toxic chemicals used to extract the valuable materials from the ore, such as the cyanide used in gold mining, remain in the tailings at the end of the process, and may leach out into ground water. Rock may naturally contain dangerous chemicals, such as arsenic and mercury, which leach into water much more readily after rock has been ground up and exposed to the wind and the rain.

Acid mine drainage is the most frequent and widespread problem. Many hardrock mines (including most gold mines) extract minerals that are bound up with sulfide compounds. These compounds produce sulfuric acid on contact with air and water, a process that occurs at a very low rate in undisturbed rock, at a higher rate in unprotected waste rock (which has a large surface area and is now exposed to air) and a much higher rate in unprotected mine tailings which have a massive surface area. The result can be the production of very acidic water, which additionally leaches metals and other chemicals from the surrounding rock.

Wet Storage in Pits & Lakes

Most modern hardrock metal mines dispose of tailings as a wet mud, held in pits lined with clay or a synthetic liner. Many mines put the tailings back into the original mining pit. Some large mines use entire existing valleys sealed off with earthen dams, and others store tailings in natural lakes. In most cases, disposal pits are covered with water, forming an artificial lake which reduces the rate of acid formation.

Wet storage often requires long-term oversight, to monitor and attempt to mitigate contaminated groundwater movement, and to maintain any crucial facilities, such as dams. Many wet storage facilities require perpetual water treatment.

Pogo Mine Tailings Facility



The "dry stack" tailings facility at Pogo Mine, Alaska

source: Dave Chambers, CSP2 (2004). Copyright held by photographer.

On-Land Storage ("Dry-Stack")

In "dry-stack disposal", tailings stored in dry form, typically by burial in a covered and lined pit. In this regard, dry-stack storage is more similar to a modern, sealed landfill. This method takes up much less space, is less susceptible to earthquake hazards, and doesn't require active water treatment. This makes it particularly relevant in locations where precipitation, earthquake risk are high, or space is limited.

However, dry-stack disposal has much higher up-front costs than wet storage. Dry-stack tailings must be dried, and the solid tailings must be transported by truck or conveyor instead of by slurry pipeline, which adds logistical complexity and cost.

Pits covers for dry-stack storage, like the dams around artificial lake impoundments, must be maintained in perpetuity. However, the long-term maintenance is much less than it is for large, wet tailings impoundment with dams.

In Alaska, Pogo Mine, Greens Creek Mine, and Nixon Fork Mine use dry-stacking for tailings disposal. In contrast, the Fort Knox and Red Dog mines use artificial wet impoundments with earthen dams, and Kensington Minestores its tailings in a natural lake.

Alaska Mines: 2012 Production						
Metric tons						
Mine	Ore Mined	Metal Production	Waste Rock Moved	Tailings Produced	Tailings Disposal & Notes	Source
Fort Knox	28,60,000	~13 tons gold	34,50,000	10,400,000 t0 13,600,000	Tailings 100% impounded; additional ore heap leached.	Fort Knox DNR Report, <u>2013</u>
Red Dog	3,746,526	596,000 tons zinc & lead	Est. 8,000,000	2,441,000	Tailings 100% impounded. Major acid generation potential.	Red Dog DNR Report, <u>2012</u>
Pogo	815,922	~10 tons gold	460,000	Not identified	60% dry-stack, 40% underground backfill.	Pogo DNR Report, <u>2012</u>
Kensington	405,343	2.6 tons gold	203,463	384,269	70% lake impounded, 30% underground backfill.	Kensington DNR Report, <u>2012</u>
Greens	288,490	199 tons	Not	288,490	Dry-stack and	Greens

Creek		silver, 21,000 tons lead, other precious metals. <u>(Alaska DNR)</u>	identified		underground backfill (ratio not identified). Major acid generation potential.	Creek <u>2012 tailings report.</u>
--------------	--	---	------------	--	---	------------------------------------

Source: <http://www.groundtruthtrekking.org/Issues/MetalsMining/MineTailings.html>