

# Riveted Joints : Types and Uses

## Instructional Objectives:

At the end of this lesson, the students should be able to know:

- Basic types of riveted joints.
- Different important design parameters of a riveted joint.
- Uses of riveted joints.

## 1. Rivets as permanent joints:

Often small machine components are joined together to form a larger machine part. Design of joints is as important as that of machine components because a weak joint may spoil the utility of a carefully designed machine part.

Mechanical joints are broadly classified into two classes viz., **non-permanent joints** and **permanent joints**.


Non-permanent joints can be assembled and disassembled without damaging the components. Examples of such joints are threaded fasteners (like screw-joints), keys and couplings etc.

Permanent joints cannot be disassembled without damaging the components. These joints can be of two kinds depending upon the nature of force that holds the two parts. The force can be of mechanical origin, for example, riveted joints, joints formed by press or interference fit etc, where two components are joined by applying mechanical force. The components can also be joined by molecular force, for example, welded joints, brazed joints, joints with adhesives etc.

Not until long ago riveted joints were very often used to join structural members permanently. However, significant improvement in welding and bolted joints has curtailed the use of these joints. Even then, rivets are used in structures, ship body, bridge, tanks and shells, where high joint strength is required.

## 2. Rivets and Riveting:


A Rivet is a short cylindrical rod having a head and a tapered tail. The main body of the rivet is called shank (see [figure 10.1.1](#)). According to Indian standard specifications rivet heads are of various types. Rivets heads for general purposes are specified by Indian standards IS: 2155-1982 (below 12 mm diameter) and IS: 1929-1982 (from 12 mm to 48 mm diameter). Rivet heads used for boiler works are specified by IS: 1928-1978. To get dimensions of the heads see any machine design handbook..

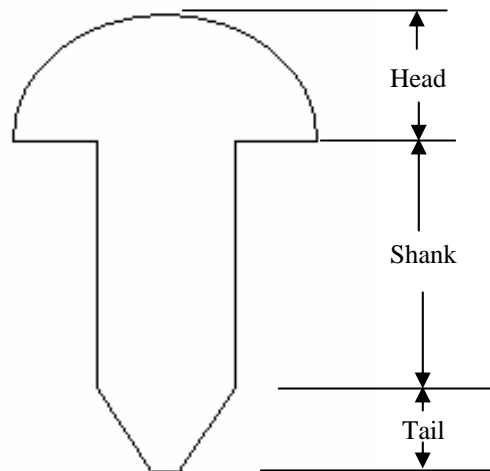

**Figure 10.1.2: Rivet and its parts**

Riveting is an operation whereby two plates are joined with the help of a rivet. Adequate mechanical force is applied to make the joint strong and leak proof. Smooth holes are drilled (or punched and reamed) in two plates to be joined and the rivet is inserted. Holding, then, the head by means of a backing up bar as shown in [figure 10.1.2](#), necessary force is applied at the tail end with a die until the tail deforms plastically to the required shape. Depending upon whether the rivet is initially heated or not, the riveting operation can be of two types: (a) [cold riveting](#) → riveting is done at ambient temperature and (b) [hot riveting](#) → rivets are initially heated before applying force. After riveting is done, the joint is heat-treated by quenching and tempering. In order to

ensure leak-proofness of the joints, when it is required, additional operation like **caulking** is done .

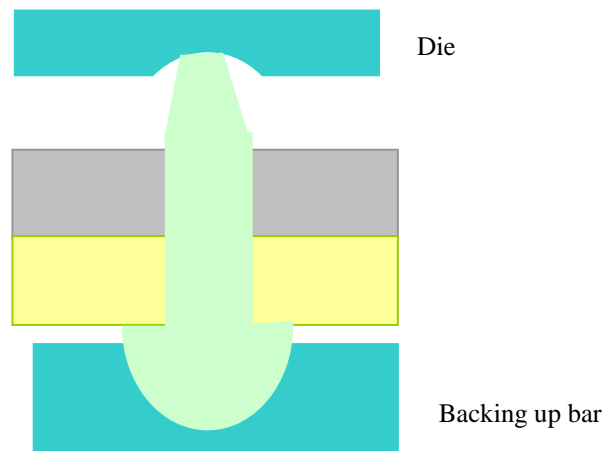

**Figure 10.1.2: Riveting operation**


### 3. Types of riveted joints and joint efficiency:

Riveted joints are mainly of two types

1. Lap joints
2. Butt joints

#### 3.1 Lap Joints:

The plates that are to be joined are brought face to face such that an overlap exists, as shown in **figure 10.1.3**. Rivets are inserted on the overlapping portion. Single or multiple rows of rivets are used to give strength to the joint. Depending upon the number of rows the riveted joints may be classified as single riveted lap joint, double or triple riveted lap joint etc. When multiple joints are used, the arrangement of rivets between two neighbouring rows may be of two kinds. In chain riveting the adjacent rows have rivets in the same transverse line. In zig-zag riveting, on the other hand, the adjacent rows of rivets are staggered. Different types of lap joints are sketched in **figure 10.1.4(a)-4(c)**.

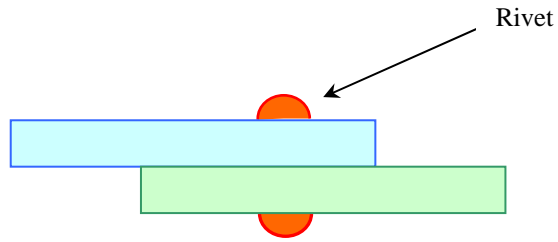

**Figure 10.1.3: Lap joint**

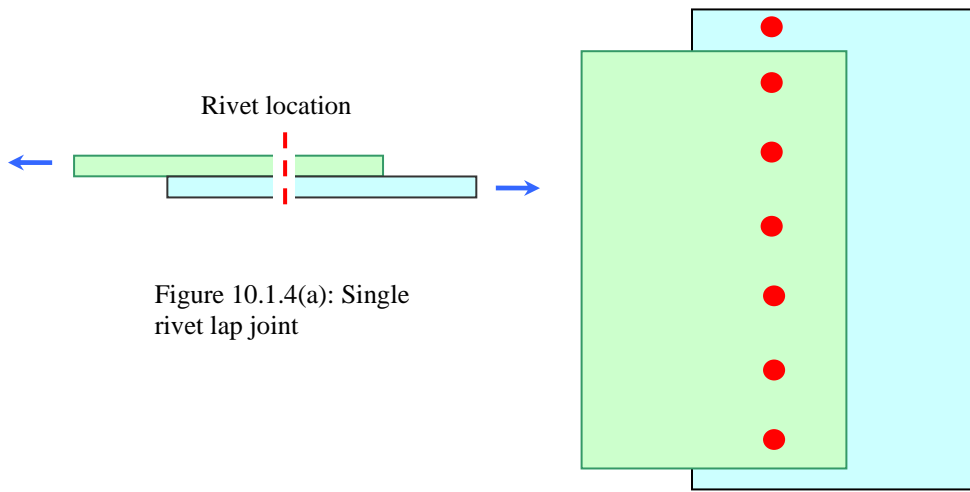


Figure 10.1.4(a): Single rivet lap joint

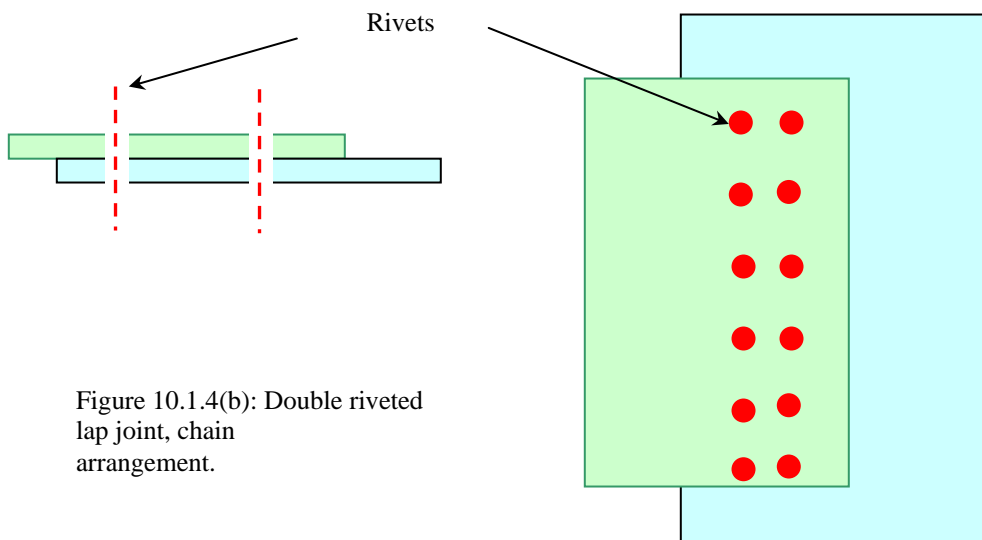


Figure 10.1.4(b): Double riveted lap joint, chain arrangement.

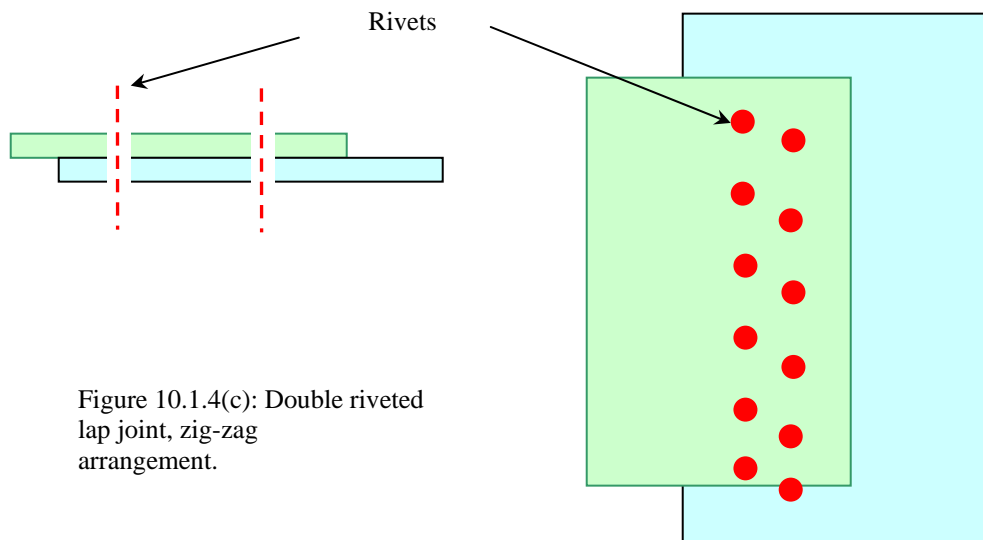


Figure 10.1.4(c): Double riveted lap joint, zig-zag arrangement.

### 3.2 Butt Joints

In this type of joint, the plates are brought to each other without forming any overlap. Riveted joints are formed between each of the plates and one or two cover plates. Depending upon the number of cover plates the butt joints may be single strap or double strap butt joints. A single strap butt joint is shown in [figure 10.1.5](#). Like lap joints, the arrangement of the rivets may be of various kinds, namely, single row, double or triple chain or zigzag. A few types of joints are shown in [figure 10.1.6\(a\)-6\(c\)](#).

The strength of a rivet joint is measured by its efficiency. The efficiency of a joint is defined as the ratio between the strength of a riveted joint to the strength of an unriveted joints or a solid plate. Obviously, the efficiency of the riveted joint not only depends upon the size and the strength of the individual rivets but also on the overall arrangement and the type of joints. Usual range of the efficiencies, expressed in percentiles of the commercial boiler joints are given in [table-10.1.1](#).

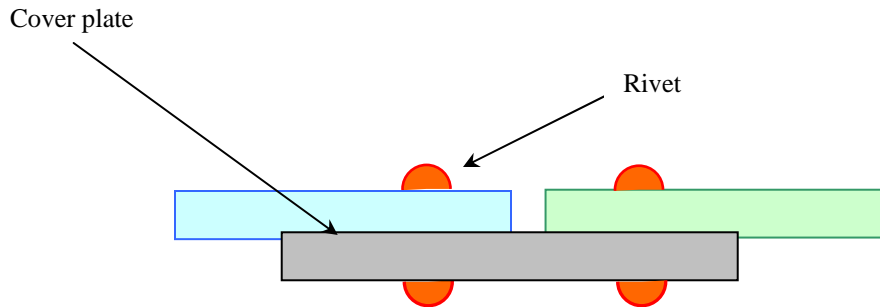


Figure 10.1.5: Butt joint with single strap.

Table 10.1.1: Efficiencies of riveted joints (in %)

<i>Joints</i>		<i>Efficiencies (in %)</i>
Lap	Single riveted	50-60
	Double riveted	60-72
	Triple riveted	72-80
Butt (double strap)	Single riveted	55-60
	Double riveted	76-84
	Triple riveted	80-88

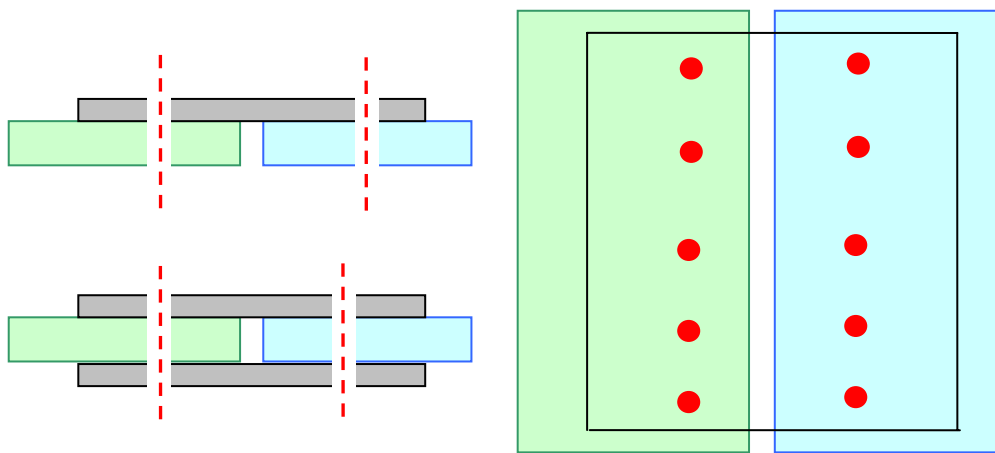


Figure 10.1.6(a): Single riveted butt joint with single and double straps

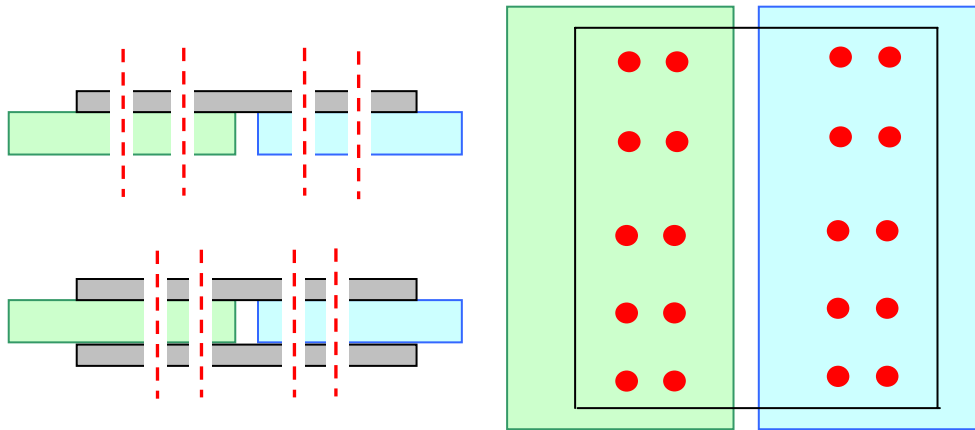


Figure 10.1.6(b): Double riveted butt joint with single and double straps (chain arrangement)

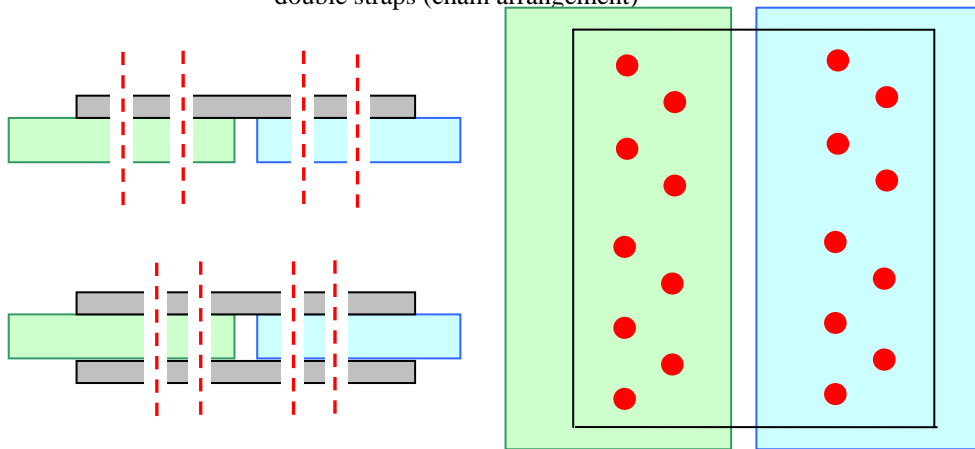


Figure 10.1.6(c): Double riveted butt joint with single and double straps (zig-zag arrangement)

#### 4. Important terms used in riveted joints:

Few parameters, which are required to specify arrangement of rivets in a riveted joint are as follows:

- a) *Pitch*: This is the distance between two centers of the consecutive rivets in a single row. (usual symbol  $p$ )
- b) *Back Pitch*: This is the shortest distance between two successive rows in a multiple riveted joint. (usual symbol  $p_t$  or  $p_b$ )

- c) *Diagonal pitch*: This is the distance between the centers of rivets in adjacent rows of zigzag riveted joint. (usual symbol  $p_d$ )
- d) *Margin or marginal pitch*: This is the distance between the centre of the rivet hole to the nearest edge of the plate. (usual symbol  $m$ )

These parameters are shown in [figure 10.1.7](#).

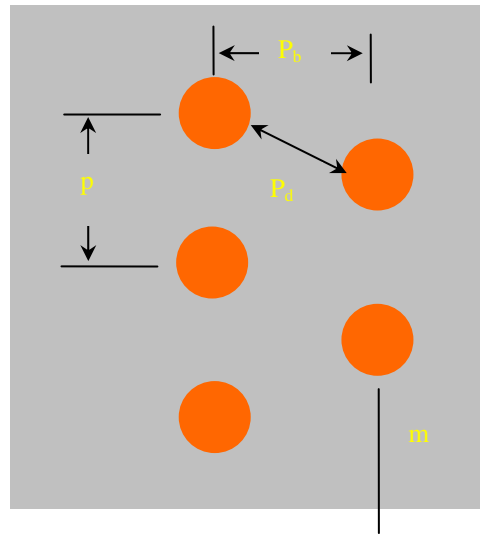


Figure 10.17: Important design parameters of riveted joint

## Review questions and answers:

**Q.1.** What should be essential qualities of a rivet and its material?

**Ans:** From the riveting procedure it is clear that a good rivet material must be tough and ductile. Steel (low carbon), coppers, brass are good candidates for rivets. According to Indian standard IS: 2998-1982 the material must have tensile strength of 40 MPa and elongation not less than 20 %. Further, the rivet shank must not be bent on itself through  $180^\circ$  without cracking in cold condition. The same test must be done for rivet elevated to  $650^\circ$  C and quenched.



**Q.2.**What are the uses of *snap headed, counter shank headed, conical headed* and *pan headed* rivets?

**Ans:** Snap heads are used mainly for structural work and machine riveting. Counter shank heads are employed for ship building where flush surfaces are necessary. Conical heads are used where riveting is done by hand hammering. Pan heads are required where very high strength is needed since they have the maximum strength, but they are very difficult to shape.

Source:

<http://nptel.ac.in/courses/Webcourse-contents/IIT%20Kharagpur/Machine%20design1/pdf/mod10les1.pdf>